

- **Versatility.**
- **Optimized pre-perforation for controlled shrinkage and easier set-up.**
- **High cohesion strength.**
- **Good optical properties.**

### APPLICATIONS

→ Bolphane BE is the standard film covering a broad spectrum of end-uses where a centerfolded film is required.




→ Its cohesion strength makes it a good candidate for multipacking applications.



# Bolphane® BE

## PRE-PERFORATION

- The optimized pre-perforation of Bolphane BE allows a controlled escape of air during the shrink stage and makes the set-up easier: no more need for perforation on the shrinkwrapper.

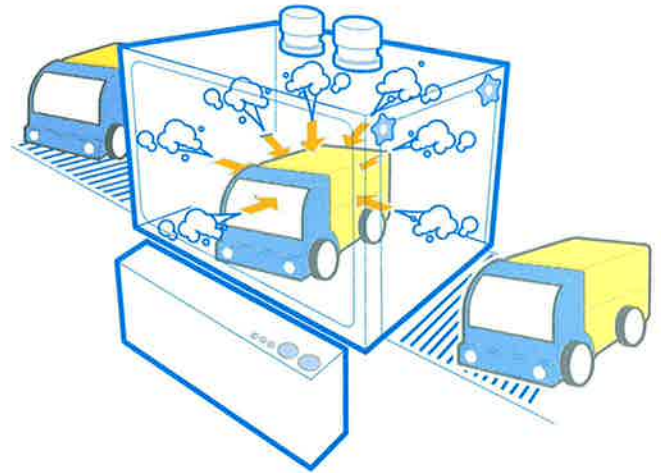

## TECHNICAL FEATURES

PROPERTIES	BE 13	BE 15	BE 19	BE 25
Gloss (85° angle) in %	118			
Haze (%)	2,5			3
Shrinkage (%)	at 93°C			
	20			
Seal strength	at 120°C			
	50			
(N/30 mm)	at 160°C			
	20	25	35	40
Water vapour permeability (g/m <sup>2</sup> /24hr at 35°C 95% RH)	at 190°C			
	50	60	70	85
O <sup>2</sup> permeability (cm <sup>3</sup> /m <sup>2</sup> 24hr bar)	16	14	11	8
Length of the roll (m) Centerfolded BE-C	8 500	7 000	5 500	4 000
Internal diameter (mm)	1 550	1 335	1 070	800
External diameter (mm)	76,2			
	245			

## PRESENTATION

- Bolphane BE is available only centerfolded. See our Product Availability Chart.

 **NODEMA**  
VERPAKKINGSMACHINES

Pampuslaan 140  
1382 JR Weesp

Nodema BV  
Tel.: 0294 - 41 19 85  
Fax: 0294 - 48 03 13  
E-mail: info@nodema.nl

 **Bolloré**